

# Analysis of the Drinking Water of Industrial Town at Chennai

K.V.Parvathavarthii\*, T.Senthilnathan\*\*, S.Sahaya Rajan\*\*\*

\* Asst. Prof, Dept. of S&H, Arignar Anna Institute of Science and Technology, Pennalur, Sriperumbudur  
 \*\* Prof, Dept. of Physics, Vellammal Engineering College, Chennai  
 \*\*\* Asst. Prof, Dept. of S&H, Arignar Anna Institute of Science and Technology, Pennalur, Sriperumbudur

**Abstract-** Water is indispensable for the drinking purpose. The water must be safe and pure must be without contaminants due to urbanization and industrialization. The present study evaluated the physical and chemical parameters of the water taken from four sampling sites located at the industrial city known as MaraimalaiNagar Town near Chennai city .More than 150 industries are located in the site. The standard methods are use for evaluation of the parameters and the water samples are found to have more concentrations of iron and alkalinity in the area .Hence, suitable water treatment is required to make it drinkable.

**Index Terms-** Physical parameters, chemical parameters and ground water

## I. INTRODUCTION

In the late years, the expanding danger to the ground water quality because of human exercises has accepted of

extraordinary significance. The antagonistic impacts on ground water quality are the aftereffects of man's movement on the ground surface, on account of agrarian, residential and mechanical effluents, and in addition sub-surface or surface transfer of sewage and modern squanders. (CPCB, 2007) The nature of ground water is of extraordinary significance in deciding the suitability of a specific ground water for a sure utilize (open water supply, watering system, modern applications, power era and so forth) (Mahananda et al., 2010). The nature of ground water is the resultant of the considerable number of procedures and responses that have followed up on the water from the minute it consolidated in the environment to the time it is released through a well. Along these lines, the nature of ground water shifts from spot to put, and from season to season with the profundity of the water table, and is basically represented by the degree and organization of the broke up solids.

## II. SOURCES FOR GROUND WATER POLLUTION

The following table shows a list of the potential groundwater contamination sources:-

Place of origin	Potential groundwater contamination source			
	Municipal	Industrial	Agricultural	Individual
At or near the land surface	Air pollution, municipal waste land spreading for deicing streets & parking lots	Air pollution chemicals: storage & spills tailingpiles	Air pollution chemical: spills fertilizers livestock waste storage facilities & lands spreading pesticides	Air pollution fertilizers homes cleaners, detergents motor oil, paints and pesticides
				

Below the surface	landfills, leaky lines	sewer storage tanks	Pipelines underground	Underground, storage tanks, wells: constructed or abandoned	Septic systems, wells: poorly constructed or abandoned
					

Groundwater contains a few polluting influences, regardless of the fact that it is unaffected by human exercises. The sorts and centralizations of characteristic pollutions rely on upon the way of the land material through which the groundwater moves, and the nature of the energize water. (CPCB, 2007) Groundwater traveling through sedimentary shakes and soils may get an extensive variety of mixes, for example, magnesium, calcium, and chlorides. A few aquifers have high regular convergences

**AGRICULTURAL SOURCES:** Pesticides, manures, herbicides and creature waste are farming wellsprings of groundwater tainting. The horticultural defilement sources are shifted and various: spillage of manures and pesticides amid taking care of, spillover from the stacking and washing of pesticide sprayers or other application gear, and utilizing chemicals tough from or inside of a couple of hundred feet of a well.

**INDUSTRIAL SOURCES:** Assembling and administration businesses have levels of popularity for cooling water, preparing water and water for cleaning purposes. Groundwater contamination happens when utilized water is come back to the hydrological cycle. Current monetary movement requires the transportation and capacity of material utilized as a part of assembling, handling, and development. Along the route, some of this materials can be lost through spillage, spillage, or disgraceful taking care of. The transfer of squanders connected with the above exercises adds to another wellspring of groundwater defilement. A few organizations, more often than not without access to sewer frameworks, depend on shallow underground transfer. They utilize cesspools or dry openings, or send the wastewater into septic tanks.

**RESIDENTIAL SOURCES:** Private wastewater frameworks can be a wellspring of numerous classes of contaminants, including microbes, infections, nitrates from human waste, and natural mixes. Infusion wells utilized for local waste water transfer (septic frameworks, cesspools, seepage wells for tempest water overflow, and groundwater revive wells) are of specific worry to groundwater quality if found near drinking water wells. Shamefully putting away or discarding family unit chemicals, for example, paints, manufactured cleansers, solvents, oils, meds, disinfectants, pool chemicals,

pesticides, batteries, gas and diesel fuel can prompt groundwater defilement.

**SEA WATER INTRUSION** At the point when managing the abuse, rebuilding and administration of crisp groundwater in beach front aquifers, the key issue is ocean water interruption. Saltwater interruption is a kind of characteristic groundwater pollution, where the regular harmony in the middle of freshwater and saltwater in beach front aquifers is aggravated by groundwater withdrawals and other human exercises that lower the groundwater levels, lessen crisp groundwater stream to waterfront waters, and at last make saltwater interfere into the seaside aquifers, making those aquifers no more accessible for use. saltwater interruption along the coasts, the bringing down of the water table by waste waterways can likewise prompt saltwater interruption.

**STUDY AREA**


Chennai, earlier known as Madras, is the capital city of the condition of Tamilnadu, and India's fourth biggest metropolitan city. It is situated on the Coromandel bank of the Bay of Bengal. The scope of the city is 13.04o N and longitude 80.17o E. The city covers a zone of 174 Km2. It is 368 years of age and the 31st biggest metropolitan territory on the planet. There are three water bodies viz., Adayar waterway, Cooum stream and the Buckingham Canal. The Chennai Metropolitan region comprises of three areas, to be specific, Chennai city and the regions of Kancheepuram and Thiruvallur. The city is isolated on the premise of its sythesis into four noteworthy parts, North, South, West and Central Chennai.

**MARAIMALAI NAGAR TOWN**

Maraimalai Nagar Town is arranged in the south at a separation of 40 km from Chennai city. It is the listen quarters of Maraimalai Nagar or Taluk in Kancheepuram area. It is arranged at 12'41'30" scope and 74'58'00: longitude and 28m lifted from M.S.L. This town is named as Maraimalai Nagar in memory of Maraimalai Adigalar and has no legacy back-ground. The Municipality involved Kattankulathur, Potheri and Thirukatchur, Peramanur Villages and was constituted as a Third Grade Municipality in 2004. According to the GO (MS) No.154 dated 19.08.2010 it was up reviewed as an uncommon evaluation Municipality. It is situated on the National Highway No : 45.

The town is isolated into 21 wards. The degree of the city range is 58.08 Sq.Km. There are around two hundred and twenty commercial ventures in the SIDCO Industrial Estate of the Town. The popular Ford (India) Ltd., and India Pistons, are

arranged in the Industrial Estate. Eight Sampling stations were chosen from the study range, 1 each from diverse wards of the town. The number of inhabitants in the town is 81,361 as per 2011 registration.

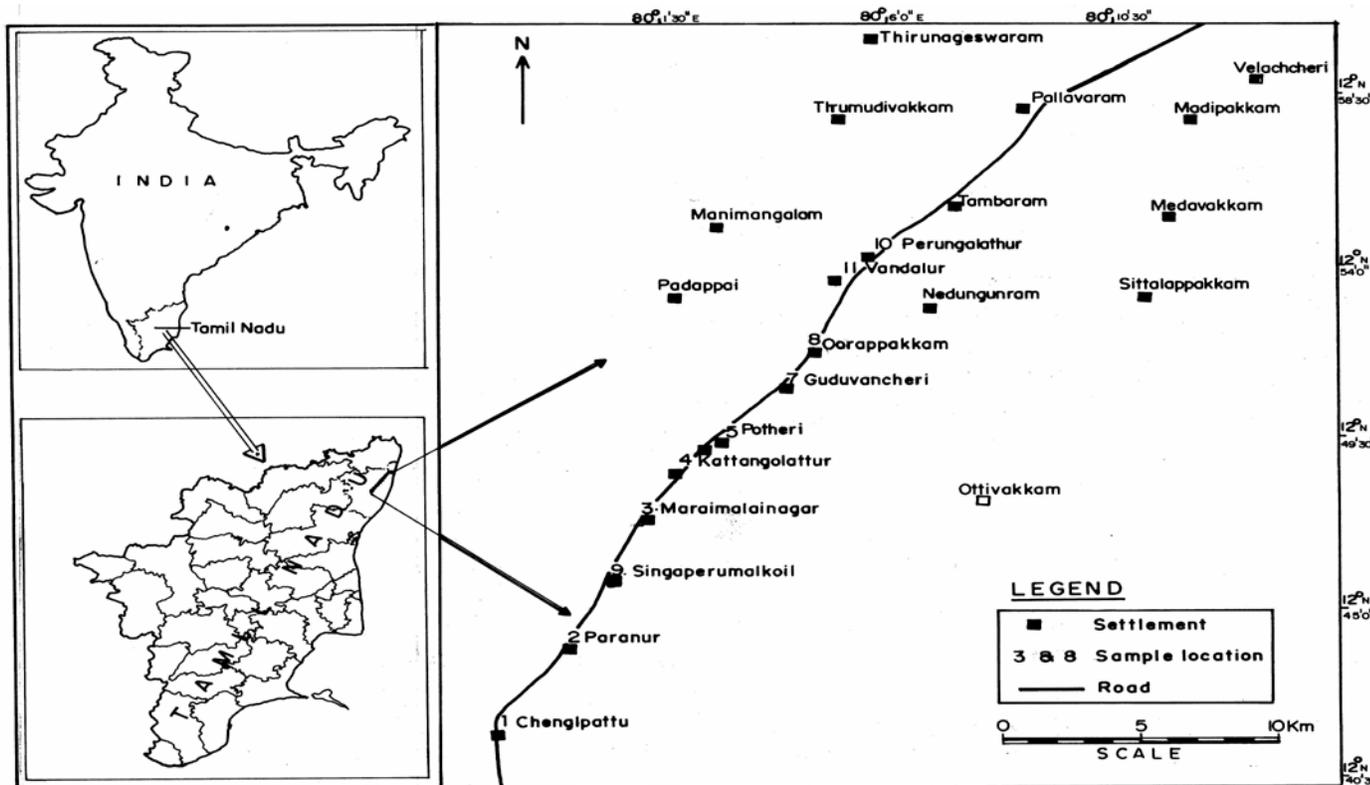

LOCATION SITE

**MATERIALS AND METHODS**

**SAMPLE COLLECTION AND PRESERVATION:**

**Criteria for the selection of Bore Wells / Tube Wells / Hand pumps**

For the choice of the groundwater quality study area, the accompanying criteria were remembered: • Drinking water wells •ells closer to the contaminating sources, similar to commercial enterprises, urban wastewater channels, trash, dumpsites and so forth. •Wells associated with regular contaminants like fluoride, iron, arsenic or such toxins.

Test accumulation, transport, protection and examination

Tests were gathered from one of the follo0wing three sorts of wells

- i. Open delved wells being used for household or watering system water supply,
- ii. Tube wells fitted with a hand-pump or a force driven pump for local water supply or watering system
- iii. Hand Pumps, utilized for drinking. (CPCB, 2007).

Open burrowed wells, which are not being used or have been surrendered, were not utilized for testing. For the accumulation

of tests, a weighted specimen jug or sampler was utilized to gather the example from an open well. Tests from the creation tube were gathered subsequent to running the well for around 5 minutes. For bacteriological specimens, when gathered from tube wells/hand pump, the spout/outlet of the source was sanitized under fire by a soul light, before the accumulation of the example in the compartment. From open wells the specimens were gathered straightforwardly into pre-cleaned glass bottles. (Ranjana Agarwal, 2010). The specimens were transported to the research center. The specimens were dissected instantly for parameters like Coliform, BOD, COD and supplements. Different parameters were broke down inside of a week's chance. The water tests for the follow component investigation were gathered in corrosive filtered polyethylene bottles, and safeguarded by including ultra immaculate nitric corrosive (2 mL/lit.). Tests for the pesticides examination were gathered in glass bottles, while tests for bacteriological investigations were gathered in disinfected high-thickness polypropylene/Glass jugs secured with aluminum foils. Every one of the specimens were put away in inspecting units kept up at 4°C and conveyed to the lab for definite concoction and bacteriological examinations.

**Table:1 METHODS USED FOR ESTIMATION OF PHYSICAL PARAMETER**

S.No	Parameter	Method
1	Colour	a. Visible Comparison Method (Only Potable water)
2	Electrical conductivity	Conductivity Meter
3	pH Value	pH Meter
4	Suspended solids (Total Number Filterable)	Gooch crucible
5	Temperature	Thermometer
6	Total Dissolved solids	Gravimetric
7	Turbidity	Nephelometric

**Table No.2 METHODS USED FOR THE ESTIMATION OF CHEMICAL PARAMETERS**

S.No	Parameter	Method
1	Alkalinity	Colour Indicator Titration
3	Arsenic (As)	Atomic Absorption Spectrophotometer
4	Boron (as B)	Colorimetric (Curcumine or Carmine)
5	Cadmium (as cd)	Atomic Absorption Spectrophotometer
6	Calcium (as ca)	Titrimetic (EDTA)
7	Fluoride (as F)	Distillation followed by colorimetric
8	Total Hardness	Titrimetic (EDTA)
9	pH	pH Meter
10	Iron (as Fe)	Colorimetric (Phenanthroline)
11	Temperature	Thermometer

**TABLE:3 STANDARDS AS PER IS WATER QUALITY10500**

S.No	Parameter	Unit	IS0500 Norms
1	Alkalinity to methyl orange	mg/l	200
2	Aluminium	mg/l	
3	Arsenic	mg/l	0.05
4	Cadmium	mg/l	0.01
5	Calcium	mg/l	75
6	Chloride	mg/l	250
7	Chromium	mg/l	0.05
8	Colour	Hazen units	10
9	Conductivity	µmhos/cm	-
10	Fluoride	mg/l	1.0
11	Hardness total	mg/l	300
12	Iron	mg/l	0.3
18	Total Dissolved solids	mg/l	500

**TABLE –4 OBSERVED PHYSICO - CHEMICAL PARAMETERS OF THE SAMPLING STATIONS DURING THE SUMMER SEASON OF THE STUDY AREA**

S.NO.	Parameter	Unit	Station 1	Station 2	Station 3	Station 4
1	Alkalinity	mg/l	328	312	418	418
2	Arsenic (As)	mg/l	<0.01	<0.01	<0.01	<0.01
3	Boron (as B)	mg/l	<0.01	<0.01	<0.01	<0.01
4	Cadmium (as cd)	mg/l	<0.01	<0.01	<0.01	<0.01
5	Calcium (as ca)	mg/l	102	57	45	45
6	Fluoride (as F)	mg/l	0.06	0.06	0.08	0.12
7	Total Hardness	mg/l	426	124	132	132
8	pH	-	7.12	7.4	7.18	6.86
9	Iron (as Fe)	mg/l	0.1	0.48	1.48	1.16
11	Temperature	°C	25.0	25.0	25.0	24.0

## RESULTS AND DISCUSSION

### Alkalinity:

All the values are above the normal limits

### pH:

Every one of the estimations of pH lie beneath as far as possible.

### Shade of the water:

The water is drab, unscented the stations.

### Temperature:

The temperature of the station 1 is 24°C and whatever is left of alternate stations is 25°C

### Cadmium:

The convergence of cadmium in every one of the stations is beneath as far as possible.

### Calcium:

The estimation of calcium is very low in station5.

### Chloride:

The centralization of chloride is higher in station 2.

### Chromium:

The estimations of chromium in every one of the stations are beneath as far as possible

### Substance Oxygen Demand:

The estimations of Chemical Oxygen Demand are normal.

### Fluoride:

Every one of the estimations of fluoride are beneath the cutoff.


### Total Hardness:

The estimations of aggregate hardness is over as far as possible in station 1

### Iron:


The concentrations of iron is higher in station 3 and astation4

Turbidity: The values fall within the normal range.

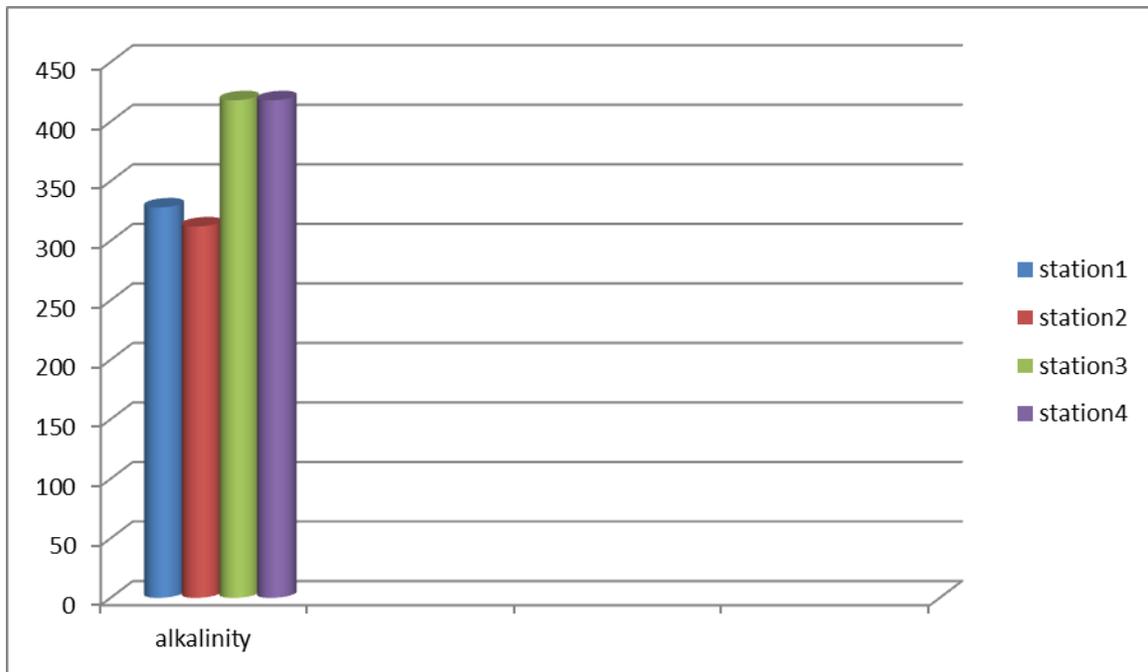


Y axis is in mg/l

Figure 1 Alkalinity

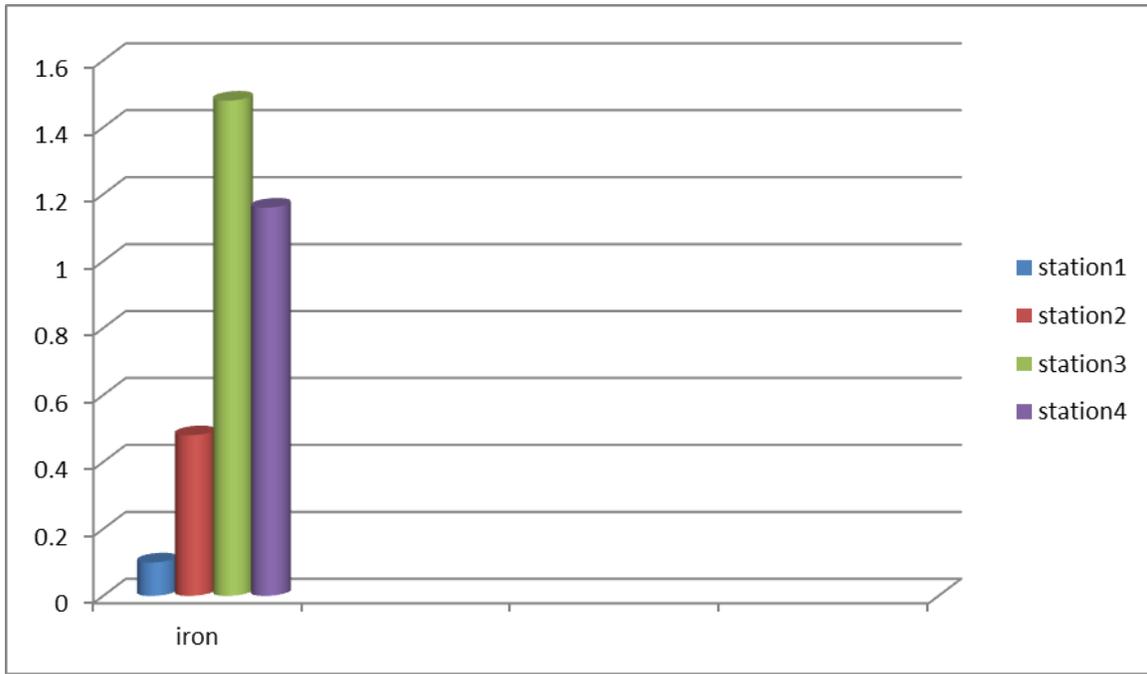

Y axis is in mg/l

Figure 2 Iron

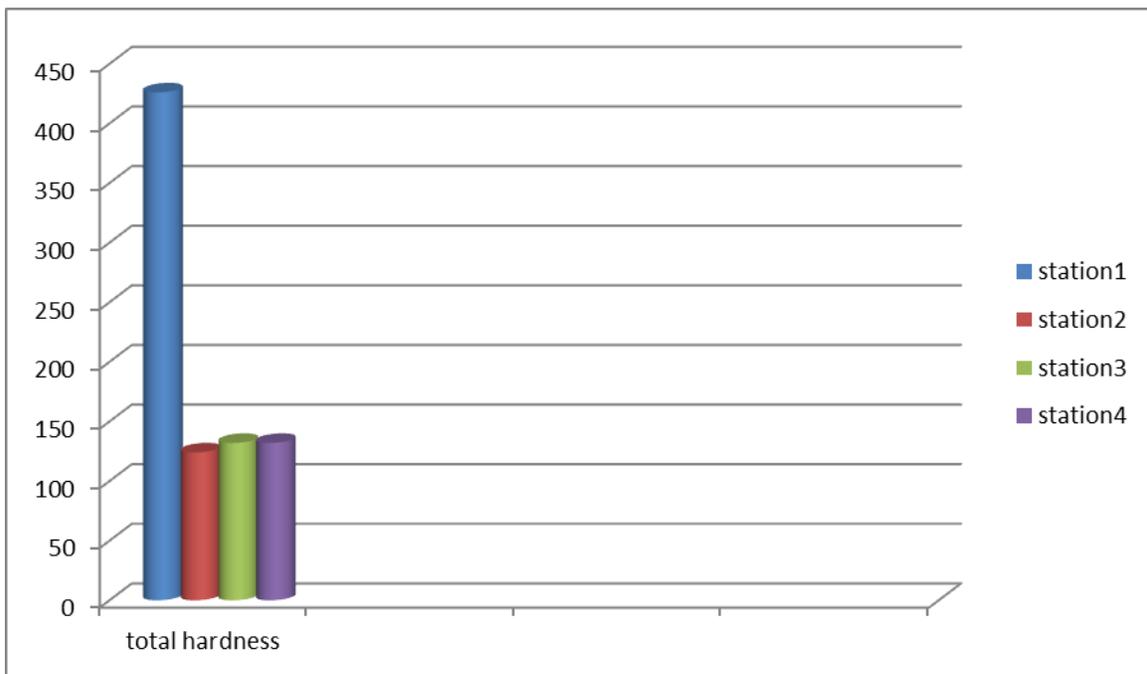

Y axis is in mg/l

Figure 3 Total hardness

**HEALTH IMPACT OF WATER POLLUTON:**

The values of iron is higher gives the following health impact to the users Iron over-burden for the most part is brought about by the sickness, hemochromatosis. It is a hereditary infection brought on by a change (transformation) in a quality that is essential in constraining the ingestion of iron from the digestive tract. On the off chance that an individual is

homozygous for a changed quality, that is, transformed qualities are found on both chromosomes that contain the quality, iron ingestion from the digestive tract is anomalous expanded. Thus, iron amasses in organs inside of the body. Thusly, in this circumstance, liver, heart, and pancreatic harm from the iron is profoundly likely, however not perpetual. On the off chance that an individual is heterozygous for a transformed quality, that is,

stand out of the chromosomes contains a changed quality and the other chromosome contains an ordinary quality, there may be an increment in assimilation of iron. On the other hand, the increment in retention is less, and there is no unmistakable proof that organs are harmed. All people with relatives with hemochromatosis ought to have their qualities examined subsequent to the mutant qualities can be distinguished in many patients who have them. This is prescribed principally to reveal people who are homozygous and, along these lines, would advantage by treatment before harm happens. Hereditary testing likewise recognizes people who are heterozygous (bearers). You recommend that you are a transporter, however hereditary testing is the best way to authoritatively decide your status - ordinary, heterozygous, or homozygous. On the off chance that you experience hereditary testing, it additionally may let you know something about your tyke. On the off chance that you have no changed qualities, your tyke ought to have no issue with the iron-containing water. That is on account of your kid would have typical qualities that would guarantee that the digestive tract does not assimilate unnecessary iron. (It's far-fetched that your youngster would get a transformed quality from your spouse unless your spouse's family has a past filled with hemochromatosis or maladies that may be connected with hemochromatosis, e.g., unexplained liver illness.) On the off chance that you have one quality that is transformed, your kid has a half risk of getting that quality. For this situation, testing your kid would figure out if or not he or she got the changed quality and is a bearer. Testing your youngster would be critical likewise on the grounds that he or she may get one changed quality from you and, however far-fetched, a second one from your spouse. In this unrealistic circumstance, your kid would have a high probability of creating hemochromatosis. In the event that an individual has two ordinary qualities, he can drink water with elevated amounts of iron. On the off chance that he is heterozygous for a hemochromatosis transformation, he presumably ought to drink filtered water as opposed to water containing large amounts of iron, despite the fact that this may be pointless. Obviously, on the off chance that he is homozygous for a hemochromatosis transformation, he ought to drink filtered water instead of water containing large amounts of iron. Also, he ought to be assessed by a doctor to figure out whether he obliges treatment to expel iron from his body and if there as of now has been harm to his organs.

#### **Alkalinity:**

In the event that the ground water is higher in alkalinity the bubbled rice gets to be yellowish and the water is not suitable for drinking purpose

#### **CONCLUSION:**

The CPCB has given the accompanying suggestions to forestall ground water contamination, after a point by point overview in different metros in India. All the ground water extraction structures ought to be enlisted and directed to maintain a strategic distance from over misuse and weakening of ground water quality. The water got starting from the earliest stage structures ought to be tried and examined to guarantee the suitability of ground water for human utilization.

The ground water deliberation sources and their environment ought to be legitimately kept up to guarantee hygienic conditions and no sewage or dirtied water ought to be permitted to permeate specifically to the ground water aquifer. Proper concrete stages ought to be developed encompassing the ground water reflection sources to dodge .

#### **REFERENCES**

- [1] Achuthan Nair G., Jalal Ahmed Bohjuari, Mujtah A. Al-maraiami, Fathi Ali Attia and Fatma.F. El-Toumi, Groundwater quality of north-east Libya, *Journal of Environ.Biology*, Oct-2006, 27(4), 695-700 (2006)
- [2] Adefemi S.O. and E.E Awokunmi, Determination of physicochemical parameter and heavy metals in water samples from Itaogbolu area of Ondo-state, Nigeria, *African Journal of Environ. Science and Technology*, Vol4 (3), pp 145-148, March 2010.
- [3] Agarwal G.D, Lunkad S.K., Malkhed .T., Diffuse agricultural nitrate pollution of groundwater in India, *Water Science and Technology*, 39(3):67-75,1999
- [4] Appasamy P., et al,Environmental impact of Industrial Effluents in Noyyal River Basin", Unpublished Report,Madras School of Economics.
- [5] Balakrishnan M., S.Arul Antony,S'Gunasekaran and R.K.Natarajan, Impact of dyeing industrial effluents on the groundwater quality in Kancheepuram (India), *Indian Journal of Science and Technology*,Vol. No.7, (Dec 2008)
- [6] Brindha K. and L.Elango, Study on Bromide in Ground water in Parts of Nalgonda District, Andhra Pradesh, *e-Journal Earth Sciecen India*, Vol.3(1), January 2010, pp:73-80
- [7] Chakraborti,Chowdhury U.K.,et al., Ground water Arsenic contamination in Bangladesh and W.Bengal India, *Environmental Health Perspectives*, Vol.108,No.5,May 2000.
- [8] Charmaine Jerome and Anita Plus, Evaluation of Water Quality Index and its impact on the quality of life in an industrial area in Bangalore, South India, *American Jour. of Scientific and Industrial Research*, 2010.1.3.595-603
- [9] David K.Essumang, Senu J., Fianko J.R., Nyarko B.K.,Adokoh C.K. and Boamponsam L., Groundwater Quality Assessment:A physicochemical properties of drinking water in a rural setting of developing countries, *Canadian Journal on Scientific and Industrial Research*, Vol.2.,No.3, March 2011.
- [10] Dewangan S., M.M.Vaishnav and P.L.Chandrakar, Pre-monsoon statistical analysis of Physico-chemical parameters and heavy metals in different water bodies of Balco Area, Korba,Rasayan Jour. Chem,Vol.3,No.4(2010),710-720
- [11] Er.Srikanth Satish Kumar Darapu, Er. B.Sudhakar,Dr.K.Siva Ramakrishana, Dr.P.Vasudeva Rao, Dr.M.Chandrasekhar, Determining Water Quality Index for the evaluation of water quality of River Godavari, *Int. Jour. of Engg. Research and Appli*, Vol.2,issue 2,pp 174-182.
- [12] Groud Water Quality Survey in Bollaram-Patancheru, Status of groundwater quality in India-Part I,CPCB, February 2007
- [13] Ground Water Quality Survery in Bhadrawathi, Status of groundwater quality in India -Part -I, CPCB, February 2007
- [14] Ground Water Quality Survey in Ankleshwar, Status of groundwater quality in India -Part -I. CPCB, February 2007.
- [15] Ground Water Quality Survey in Coimbatore City, Status of groundwater quality in India -Part -I, CPCB, February 2007.
- [16] Ground Water Quality Survey in Agra Metropolitan City, Status of groundwater quality in India -Part -I, CPCB, February 2007.
- [17] Ground Water Quality Survey in Chembur, Status of groundwater quality in India -Part -I, CPCB, February 2007.
- [18] Ground Water Quality Survey in Chennai Metropolitan City, Status of groundwater quality in India -Part -ICPCB, February 2007.
- [19] Ground Water Quality Survey in Kochi, Status of groundwater quality in India -Part -I. CPCB, February 2007.
- [20] Ground Water Quality Survey in Lucknow Metropolitan City, Status of groundwater quality in India -Part -I, CPCB, February 2007.
- [21] Senthilnathan .T and Parvathavarthini .K.V "Assessment of water quality in Chennai city, Tamilnadu", International Conference on Environment

Challenges” A Global concern, Kanya Maha Vidyalaya 15th October - 16th October 2010.

- [22] Senthilnathan .T. and Parvathavarthini .K.V. “Assessment of ground water quality of Maraimalai Nagar Town” in International Congress of Environmental Research, 16th – 18th Sep 2010, Mauritius.
- [23] Senthilnathan and Parvathavarthini.K.V “Analysis of water quality characteristics in selected areas of Chennai city”, National Conference on Green Chemistry (NCGC), September 2010.
- [24] Senthilnathan T and Parthavarthinin.K.V and Shanthi M.George “Assessment of ground water quality of Maraimalai Nagar Town, near Chennai, India”, Journal of Environment Research and Development, Vol.5 No.4, Apr – June 2011, PP 943-947.
- [25] Senthilnathan. T, Parthavarthini K.V. and Shanthi M.George “Analysis of water quality in Chennai City – A statistical approach”, 8th Indian Science Congress, 3rd to 7th Jan 2011 SRM University, Chennai .

#### AUTHORS

**First Author** – K.V.Parvathavarthii, Asst. Prof, Dept. of S&H, Arignar Anna Institute of Science and Technology, Pennalur, Sriperumbudur

**Second Author** – T.Senthilnathan, Prof, Dept. of Physics, Vellammal Engineering College, Chennai

**Third Author** – S.Sahaya Rajan, Asst. Prof, Dept. of S&H, Arignar Anna Institute of Science and Technology, Pennalur, Sriperumbudur